



HQ HEATING SDN. BHD. (702148-U)


No. 69, Jalan Laksamana 6, Off Jalan Sungai Jati, Taman Sentosa,
41200 Klang, Selangor Darul Ehsan, Malaysia

Tel: 603-516271111; Fax : 603-51627011

Email: hqheating69@gmail.com; Website: hqheating.com.my

STAINLESS STEEL 'U' FINNED LOAD BANK HEATER

- VOLTAGE : 415VAC(Standard), others can be request.
- SHEATH WATT DENSITY : Refer attached table
- OPERATING TEMPERATURE : Maximum persibble temperature if element when operating is 400 °C. Elements will not exceed 400 °C in air with an ambient temperature of 20 °C and velocity of 4.0 metre/sec.
- CONSTRUCTION : Continuous spiral stainless steel fins to Ø (1), stainlees steel sheet tubular element. Dia over fin Ø (2). fining pitch 6mm.
- FINISH : Natural
- MOUNTING : Nickel plated brass bush Ø (3) thred, nut and washers included.

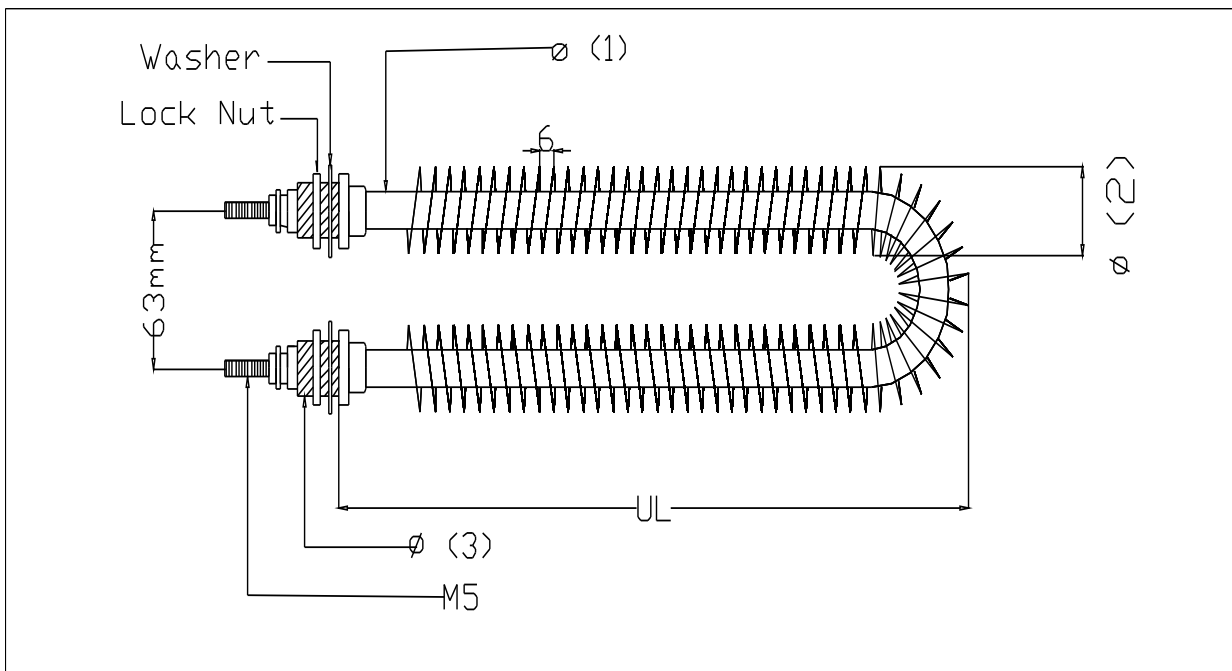

MODEL NO.	WATTS (W)	UL(mm)	Ø 1(mm)	Ø 2(mm)	Ø 3(mm)	SHEATH WATT DENSITY
HQ333-U-250	333	250	11	27	16	23 KW/m ² (15 W/in ²)
HQ667-U-250	667	250	11	27	16	45 KW/m ² (29 W/in ²)
HQ1667-U-330	1667	330	11	27	16	82 KW/m ² (53 W/in ²)
HQ3333-U-570	3333	570	11	27	16	92 KW/m ² (59 W/in ²)
HQ-5000-U-840	5000	840	11	27	16	90 KW/m ² (58 W/in ²)
HQ6667-U-950	6667	950	11	27	18	104 KW/m ² (67 W/in ²)
HQ8333-U-960	8333	960	12	29	16	121 KW/m ² (78 W/in ²)