


## WITHDRAWABLE TUBULAR HEATERS

These alloy sheathed alternatives to ceramic bobbin heaters are designed to improve service life where ceramic bobbins will deteriorate through physical damage. They insert into a 50mm nominal diameter sheath (refer over page). All units consist of 3 'U' shaped elements each rated at 240volts (Except the 15kW 40255x60.T41.150). They may therefore be wired for 415/240V star connection or 240V single phase. Min. length available 300mm penetration. Max power density 31kW/m<sup>2</sup>.

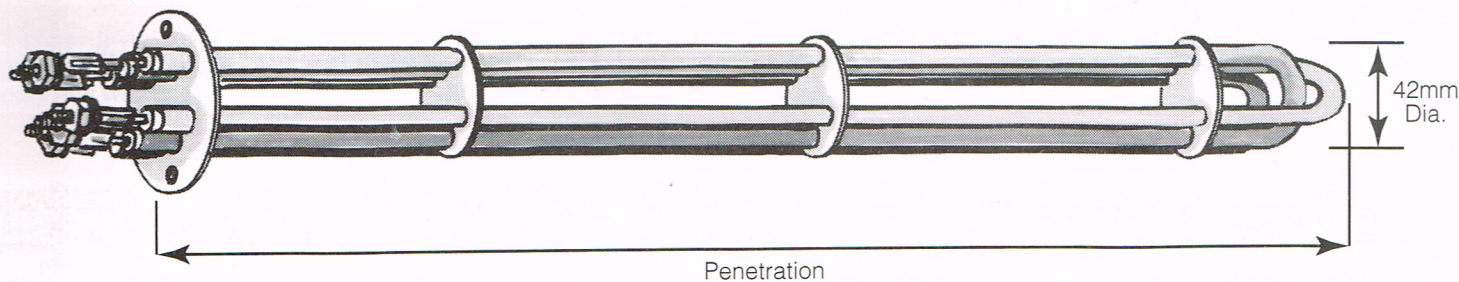

| CATALOGUE No.     | WATTAGE | WATTS DENSITY kW/m <sup>2</sup> | PENETRATION |
|-------------------|---------|---------------------------------|-------------|
| 40255 x 12T2407   | 750     | 7.75                            | 660         |
| 40255 x 12T2415   | 1500    | 15.5                            | 660         |
| 40255 x 12T2430   | 3000    | 31                              | 660         |
| 40255 x 15T2409   | 900     | 7.75                            | 813         |
| 40255 x 15T2418   | 1800    | 15.5                            | 813         |
| 40255 x 15T2436   | 3600    | 31                              | 813         |
| 40255 x 16T2410   | 1000    | 7.75                            | 864         |
| 40255 x 16T2420   | 2000    | 15.5                            | 864         |
| 40255 x 16T2440   | 4000    | 31                              | 864         |
| 40255 x 20T2412   | 1200    | 7.75                            | 1067        |
| 40255 x 20T2424   | 2400    | 15.5                            | 1067        |
| 40255 x 20T2448   | 4800    | 31                              | 1067        |
| 40255 x 24T2415   | 1500    | 7.75                            | 1270        |
| 40255 x 24T2430   | 3000    | 15.5                            | 1270        |
| 40255 x 24T2460   | 6000    | 31                              | 1270        |
| 40255 x 29T2418   | 1800    | 7.75                            | 1525        |
| 40255 x 29T2436   | 3600    | 15.5                            | 1525        |
| 40255 x 29T2472   | 7200    | 31                              | 1525        |
| 40255 x 32T2420   | 2000    | 7.75                            | 1676        |
| 40255 x 32T2440   | 4000    | 15.5                            | 1676        |
| 40255 x 32T2480   | 8000    | 31                              | 1676        |
| 40255 x 40T2425   | 2500    | 7.75                            | 2083        |
| 40255 x 40T2450   | 5000    | 15.5                            | 2083        |
| 40255 x 40T24100  | 10000   | 31                              | 2083        |
| 40255 x 48T2430   | 3000    | 7.75                            | 2490        |
| 40255 x 48T2460   | 6000    | 15.5                            | 2490        |
| 40255 x 48T24120  | 12000   | 31                              | 2490        |
| 40255 x 60T2437   | 3750    | 7.75                            | 3100        |
| 40255 x 60T2475   | 7500    | 15.5                            | 3100        |
| 40255 x 60T41150* | 15000   | 31                              | 3100        |