


ROBERTSHAW

COMMERCIAL ELECTRIC THERMOSTATS

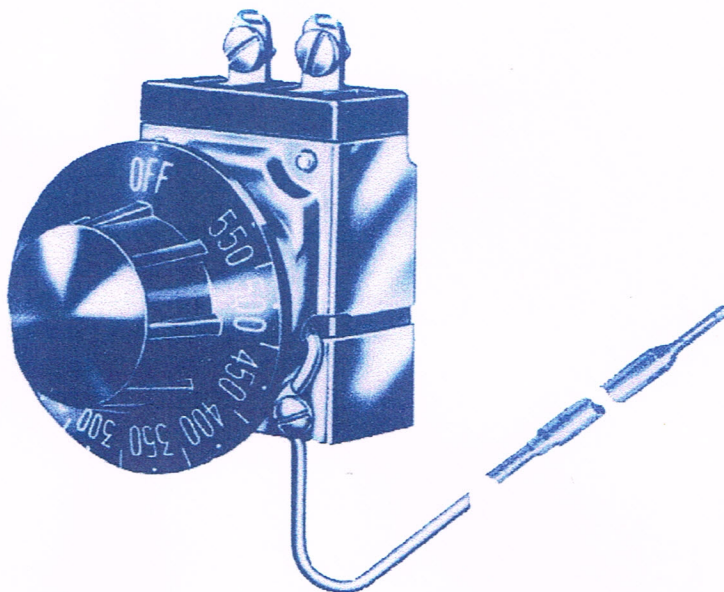

B-10 COMMERCIAL DIRECT ACTING

MODEL NO.	RANGE °C	CAPILLARY LENGTH	BULB SIZE	MATERIAL	KNOB	ELECTRICAL RATING
B-10	50-300	36"	98.4x9.5	Nickle Plated	263-8	20amp at 115VAC resistive load 15amp at 115VAC resistive load
B-10	15-120	48"	114.3x9.5	Copper	266-2	

EA-5

MODEL NO	RANGE	TYPE TERMINALS	MOUNTING SCREWS	CAPILLARY & BULB COATING	STUFFING BOX	DIALS+ AVAILABLE	SHAFT (STEM) SPECIFICATIONS
EA5-008-48	15°-120°C	screw	yes	none	none	5-120°C 60-250° F 1 to 10	1. Length, 20.64 (13/16") 2. Diameter, 6.30/6.35mm (.248/.250") 3. Flat Height, 4.70/4.75mm (.185/.187") 4. Flat Position, Down at off
EA5-340-48	50°-300°C	screw	yes	tin zinc	none	50-300°C 150-550°F 1 to 10	

EA-9

MODEL NO	RANGE	TYPE TERMINALS	MOUNTING SCREWS	CAPILLARY & BULB COATING
EA9-910-01	120°C-450°C	screw	yes	none