




## HQ HEATING SDN. BHD. (702148-U)

No. 69, Jalan Laksamana 6, Off Jalan Sungai Jati, Taman Sentosa,  
41200 Klang, Selangor Darul Ehsan, Malaysia  
Tel: 603-516271111; Fax : 603-51627011  
Email:hqheating69@gmail.com ; Website:hqheating.com.my

### HQSS SERIES FINNED HEATERS

|                       |                                                                                                                                                                          |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SHEATH WATT DENSITY   | : 60 KW/M <sup>2</sup> (39 W/in <sup>2</sup> )                                                                                                                           |
| OPERATING TEMPERATURE | : Maximum permissible temperature of element when operating is 400°C. Element will not exceed in air velocity with an ambient temperature of 20°C and of 1.0 meters/sec. |
| CONSTRUCTION          | : Continuous spiral stainless steel fins to 11mm dia stainless steel sheath tubular element .Dia over fin 28mm .Finning pitch 6mm.                                       |
| FINISH                | : Natural                                                                                                                                                                |
| MOUNTING              | : Nickel plated brass bush M16 tread clearance hole of 18mm required nut and washers included.                                                                           |

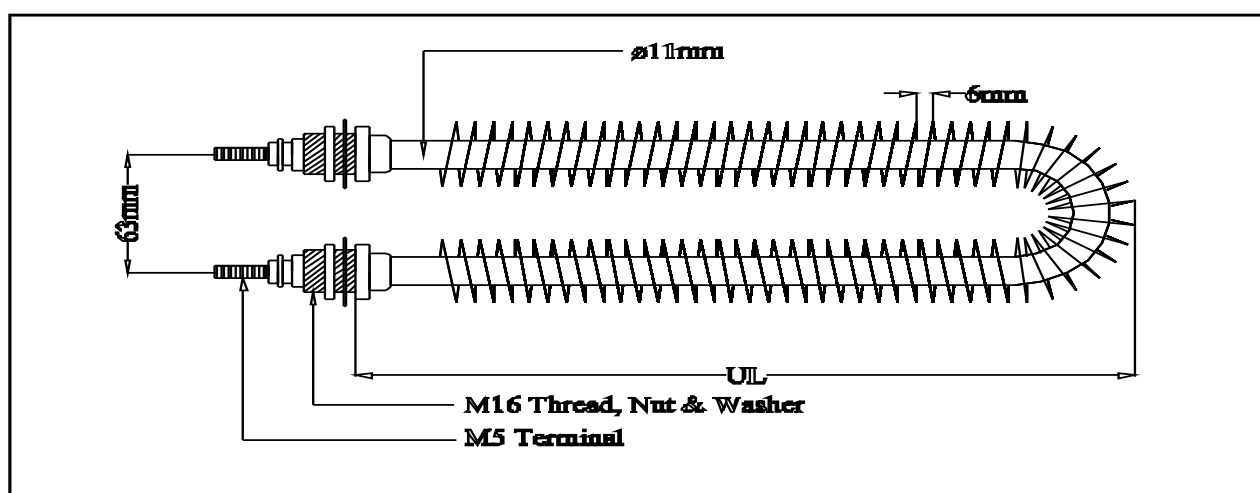

| HQSS-U' FORM FINNED HEATER |          |          |        |
|----------------------------|----------|----------|--------|
| MODEL NO                   | WATTS(W) | VOLTS(V) | UL(mm) |
| HQSS075U240                | 750      | 240      | 226    |
| HQSS100U240                | 1000     | 240      | 281    |
| HQSS125U240                | 1250     | 240      | 346    |
| HQSS150U240                | 1500     | 240      | 406    |
| HQSS175U240                | 1750     | 240      | 459    |
| HQSS200U240                | 2000     | 240      | 526    |
| HQSS250U240                | 2500     | 240      | 638    |
| HQSS300U240                | 3000     | 240      | 747    |
| HQSS350U240                | 3500     | 240      | 858    |
| HQSS400U240                | 4000     | 240      | 973    |
| HQSS450U240                | 4500     | 240      | 1109   |
| HQSS500U240                | 5000     | 240      | 1235   |
| HQSS600U240                | 6000     | 240      | 1453   |